


PRODUCT INFORMATION

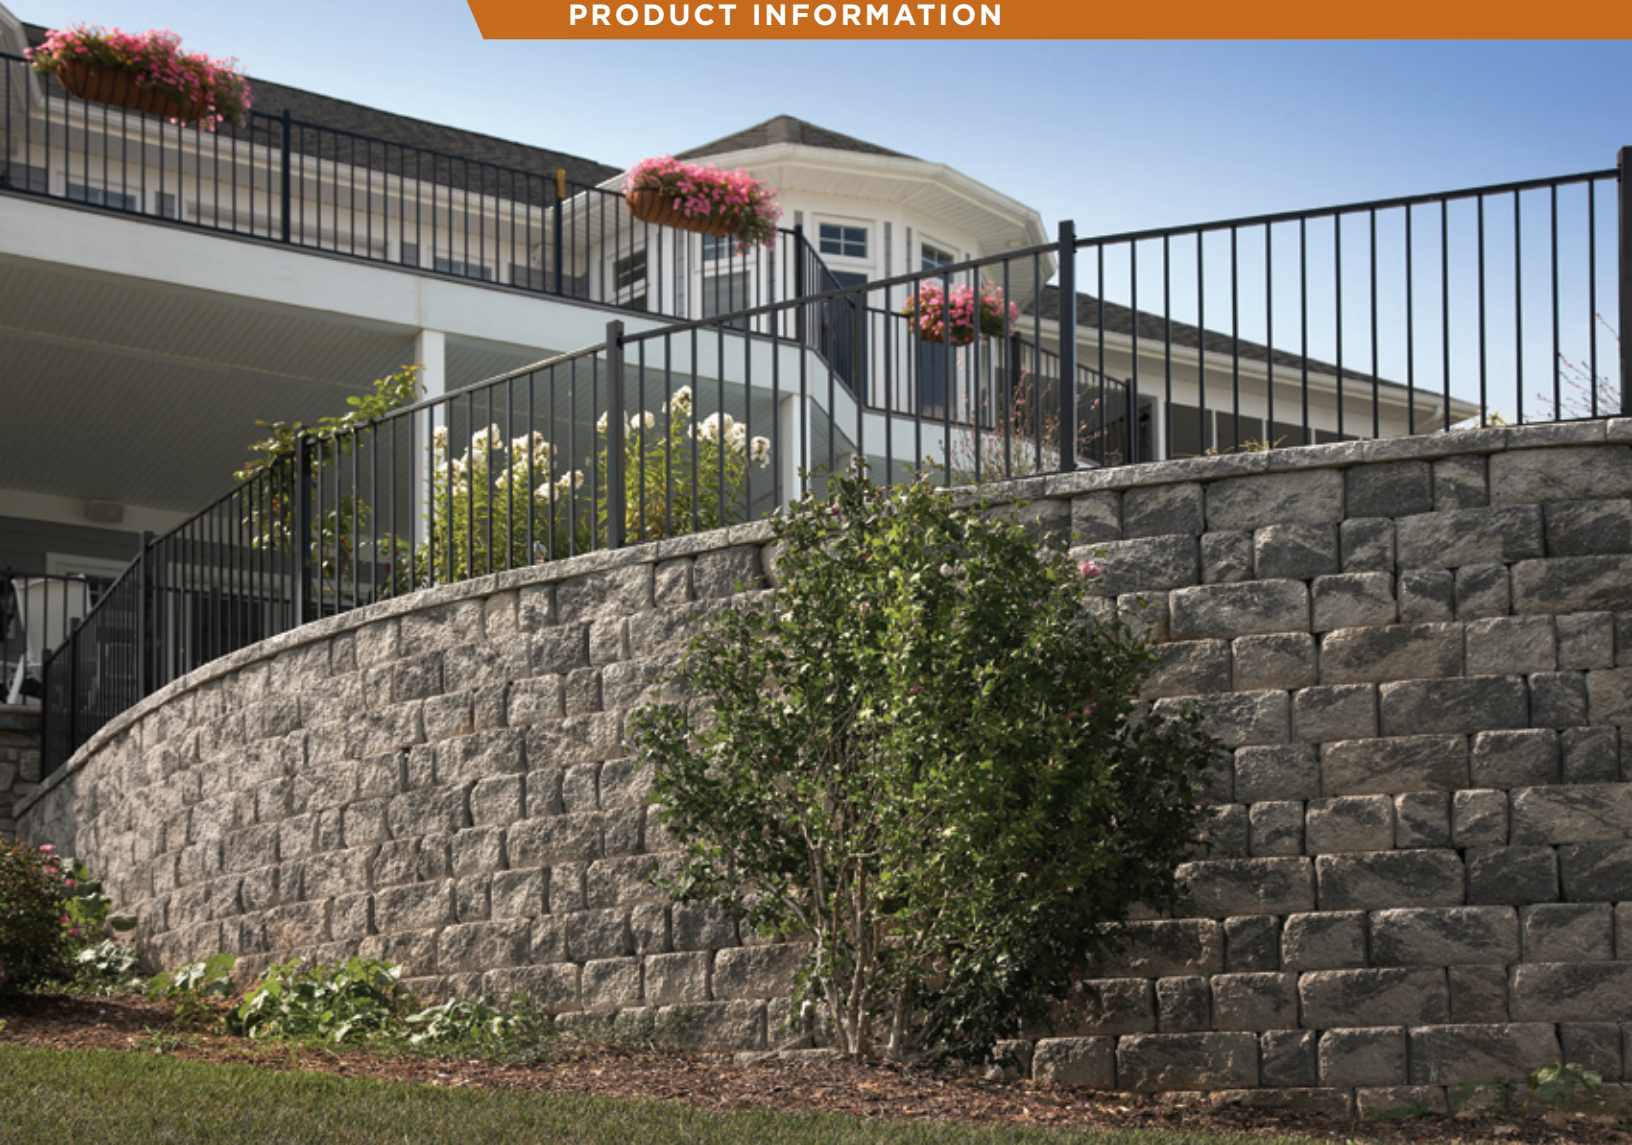

Renowned for its rough-hewn face and earthen tones, the Diamond Pro Stone Cut[®] retaining wall system imparts a rich, rough-hewn beauty not commonly found in commercial retaining walls. The performance characteristics make it the proven solution for tall walls, Department of Transportation projects, commercial developments, water applications and other critical wall needs.

- Patented rear-lip technology
- Can be used to build gravity walls up to 4 feet high, including buried course

- Taller walls can be built using geosynthetic reinforcement or stabilized aggregate when designed by a qualified engineer
- Minimum inside radius 7 feet. Minimum outside radius 4 feet. Varies depending on the installation pattern used.
- ICC evaluated



Diamond Pro Stone Cut[®]

RETAINING WALL SYSTEM

PRODUCT INFORMATION



Stretcher Units	Large	Medium	Small
Approximate Dimensions*	8" x 18" x 12"	8" x 11" x 12"	8" x 7" x 12"
Approximate Weight*	77 lbs.	45 lbs.	34 lbs.
Coverage	1.0 sq. ft.	.601 sq. ft.	.379 sq. ft.
Setback/Batter	1"/7.1°	1"/7.1°	1"/7.1°



Accessory Units	Cap	Corner
Approximate Dimensions*	Front, 4" x 17 ¹ / ₄ " x 10 ³ / ₈ " Back, 4" x 12" x 10 ³ / ₈ "	8" x 18" x 9"
Approximate Weight*	40 lbs.	101 lbs.
Coverage	1.22 linear ft.	

See anchorwall.com for installation instructions.

*Actual dimensions and weight may vary from these approximate dimensions due to variations in manufacturing processes. Specifications may change without notice. See your Anchor representative for details, color options, block dimensions and additional information.

© 2009 Anchor Wall Systems, Inc. The Diamond Pro Stone Cut[®] wall system is manufactured under license from Anchor Wall Systems, Inc. (AWS). The "Anchor Build Something Beautiful" logo and Diamond Pro Stone Cut are trademarks of AWS. The wall system blocks are covered by the AWS Limited Warranty. For a complete copy, visit your local dealer or see anchorwall.com.

Anchor Wall Systems, Inc., 5959 Baker Road, Suite 390, Minnetonka, MN 55345.
A&B0810

EW835 08/09